Certifications

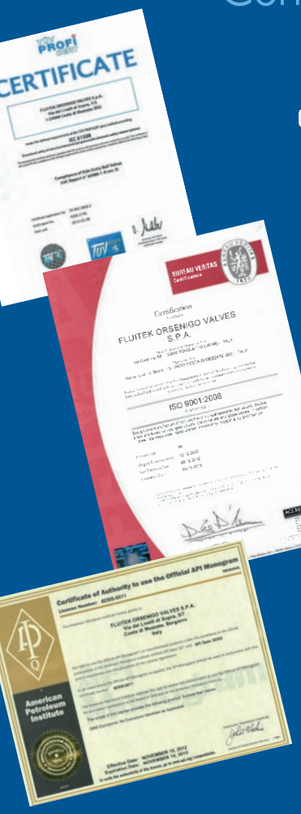

ISO 9001:2008

PED Directive (module H) 97/23/EC

BV MODE II Scheme

IEC 61508

Atex Directive 94/9/EC

GOST R

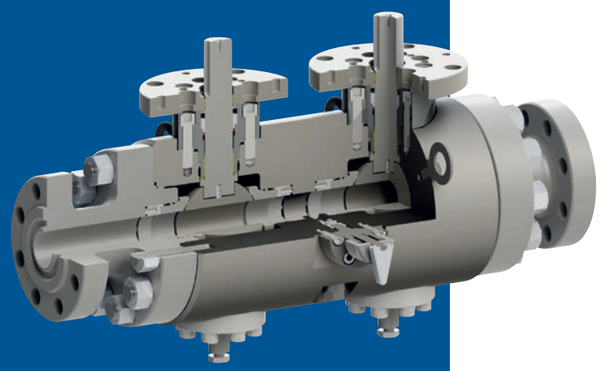

FluitekOrsenigoValves

Headquarter
Ball Valves Manufacturing Plant
Via dei Livelli di Sopra, 5/7
24060 Costa di Mezzate (BG) ITALY
phone +39 035 66 65 01
fax +39 035 66 65 047

info@fluitekvalves.com
www.fluitekvalves.com

04-2015 - IMAGINA TV

DOUBLE BLOCK AND BLEED VALVES

FluitekOrsenigoValves

specially engineered valves
for the oil and gas and power generation industries

Who we are

FLUITEK ORSENIGO VALVES started out ball valves manufacturing for the Oil and Gas industry in 1993 with the Orsenigo brand.

Friulco Spa started its own production of cast steel valves for the energy and petrochemical industry in 1990.

Their paths crossed in 2012 with the acquisition of Friulco by FLUITEK ORSENIGO VALVES.

This combined wealth of experience, know-how and resources is now integrated in the new reality of FLUITEK ORSENIGO VALVES, with manufacturing facilities and headquarters located in the North of Italy.

Engineering

FLUITEK ORSENIGO VALVES mission consists in providing quick and effective answers to its customers' needs. Our problem solving approach is developed through the engineering of solutions and the product manufacturing, coupled with our knowledge and study of materials. FLUITEK ORSENIGO VALVES Engineering Organizations consists of a Product Development and the Engineering Department. The first is dedicated to research on materials and processes and the design and development of new solutions. The second is focused on product engineering with 15 people involved including engineers, designers, product specialists.

Fluidynamic computerized analysis

FLUITEK ORSENIGO VALVES can perform thermo-fluidynamic analysis on its products by means of a computerized calculation system (CFD, computational fluid dynamics). Valve design and construction details are improved with the use of virtual modeling techniques and "what-if" simulations. Data concerning pressure and velocity values, forces acting on the surfaces, temperatures and all the main physical variables can be provided to the customers. Our computer analysis included static, dynamic and thermal analysis.

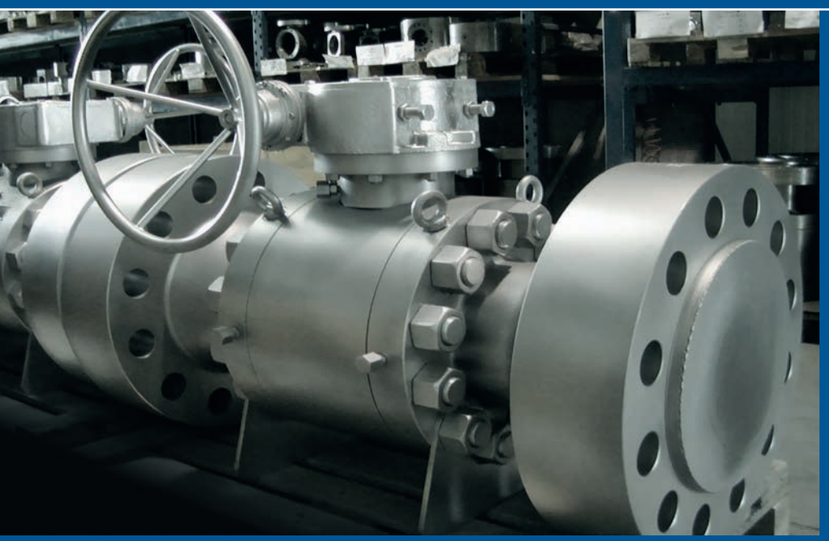

Quality

The main quality controls carried out by FLUITEK ORSENIGO VALVES are:

Dimensional Inspection

All necessary equipment in house
Faro measuring arm.
Zeiss Bridge-type 3D Measuring Machine

Non Destructive Testing

MT: Magnetic particles examination
PT: Dye penetrant examination
UT: Ultrasonic examination
RT: Radiographic Examination Capability of shooting on site, x-ray films development and reading in house (ASME reference plates)

Pressure Test To

API598 - ISO 5208 - BS 6755 – API 6A – API 6D – ASME B16.34 – EN 12266 - 1
High Pressure Hydraulic Shell test
High Pressure Hydraulic Back Seat test
High Pressure Hydraulic Seat test
Low Pressure Pneumatic Seat test
Functional test

Tests equipment:

4 Hydaulic & Pneumatic horizontal testing unit for valves DN 1/2" to 16", up to class 4500#
3 Hydaulic & Pneumatic vertical testing unit for valves DN 2" to 16", up to class 600#
1 Hydaulic & Pneumatic horizontal testing unit for valves DN 10" to 48", up to class 4500#
2 Hydaulic & Pneumatic horizontal testing unit for valves DN 1/2" to 4", up to class 10000#
1 Hydaulic & Pneumatic horizontal testing unit for valves DN 2,1/2" to 20", up to class 1500#
1 Hydaulic & Pneumatic horizontal testing unit for valves DN 2,1/2" to 24", up to class 1500#
2 Hydaulic & Pneumatic horizontal testing unit for valves DN 6" to 36", up to class 2500#

Chemical Analysis

PMI: Positive material identificatio
Mass spectrometer 16 channels

Mechanical Tests

Hardness test
Charpy-V impact test

Micrographic analysis

Available also:

Fugitive emission test (helium/nitrogen)
Cryogenic test
Corrosion test
Cleanliness for oxygen application
Fire Safe tests
High pressure gas tests
Tensile test (including hot tensile)
Hyperbaric Test for subsea application
Torque test

Qualified Personnel

FLUITEK ORSENIGO VALVES personnel is qualified to carry out all the above mentioned controls. In particular, for Non Destructive Tests, FLUITEK ORSENIGO VALVES staff includes fully trained qualified and certified personnel in accordance with STN-TC-1A and EN 473 requirements.

DOUBLE BLOCK AND BLEED VALVES

Our valves are designed and manufactured for a broad range of applications

CHARACTERISTICS

- Range of designs, materials, sizes and pressure classes according to ASME, API, NACE specifications
- Fire safe according to BS6755/API 6FA/ API 607
- **Floating** or **Trunnion** mounted
- **Side entry** flanged or **Compact design** (special construction with pipeline bolts screwed into threaded blind holes machined into the valve body that allow a further **space and weight saving**)
- **Top Entry** construction available
- Design available for sizes up to 24" and pressure classes including ANSI 4500 and API 10000 psi. Larger sizes available upon request
- Full bore, suitable for **pigging** operations, or reduced bore
- Special constructions for **High and Low Temperature** (Cryogenic) available
- **Wide range of materials** for both body and internals, including: carbon steel, low alloy steels, stainless steels, Duplex, Superduplex, Ni-alloys and titanium
- **CRA Weld overlay** in dynamic or/and static seals pockets or **internal cladding** available
- Large **variety** of seat and stem **seals selection**
- **Self Relieving** and/or **Double Piston** Seats options available
- **Soft** Seated or **Metal** Seated construction
- Hardfacing/Coating: ENP, Tungsten and Chromium Carbide, Ceramic
- Any **Body Connection** to the in-between-bleed and any **accessory** can be provided **upon request** to suit service requirements

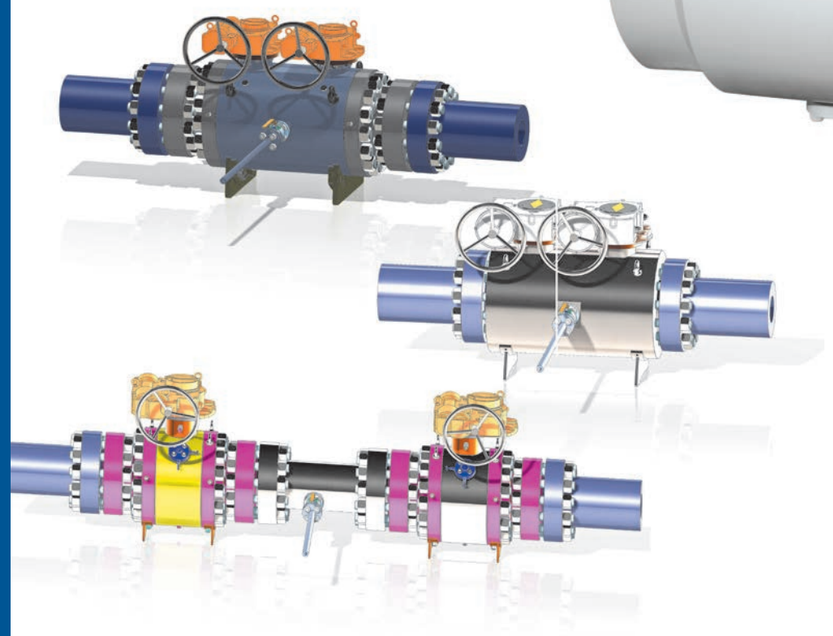

BENEFITS

SPACE AND WEIGHT SAVINGS

COST SAVINGS

NEGLIGIBLE PRESSURE DROP, NO TURBOLENCE

REDUCED LEAK POINTS

REDUCED STRESSES FROM LOADING AND VIBRATION

IMPROVED SAFETY IN OPERATIONS